Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 212206

PEM* A SERIES
FEATURES AND SPECIFICATIONS

OPTIONS

PART NUMBER	RATED CURRENT	IEC CONN	FUSE	ON/OFF SWITCH	VOLT SELECT
A3-12S10E	3A	YES	YES	YES	NO
A3-12VS10E	3A	YES	YES	NO	YES
A3-12S10EVS	3A	YES	YES	YES	YES
A3-12AVS3	3A	YES	YES	NO	YES
A6-12S10E	6A	YES	YES	YES	NO
A6-12VS10E	6A	YES	YES	NO	YES
A6-12S10EVS	6A	YES	YES	YES	YES

SPECIFICATIONS

1.0 HIGHPOT RATING:
LINE-TO-GROUND: 2000 VAC
LINE-TO-LINE: 1750 VDC

2.0 RATED VOLTAGES AND FREQUENCY:
115/250 VAC, 47-63 Hz

3.0 MAXIMUM LEAKAGE CURRENT,
EACH LINE TO GROUND.
115 VAC, 60 Hz: 0.25 mA MAX
250 VAC, 60 Hz: 0.50 mA MAX

4.0 PERFORMANCE

MHz.		0.15	0.20	0.50	10.00	20.00
CM	L/G	15 dB	20 dB	25 dB	50 dB	50 dB
DM	L/L	3 dB	10 dB	15 dB	40 dB	35 dB

APPLICATIONS
* MICROPROCESSORS
* DATA TERMINALS
* SMPS WITH ON-BOARD FILTER

* = PEM= POWER ENTRY MODULE

FEATURES
* MINIMUM SPACE REQUIREMENT
* COST SAVING INTREGRATION
* SAFETY INTERLOCK ON FUSE

PEM* A SERIES

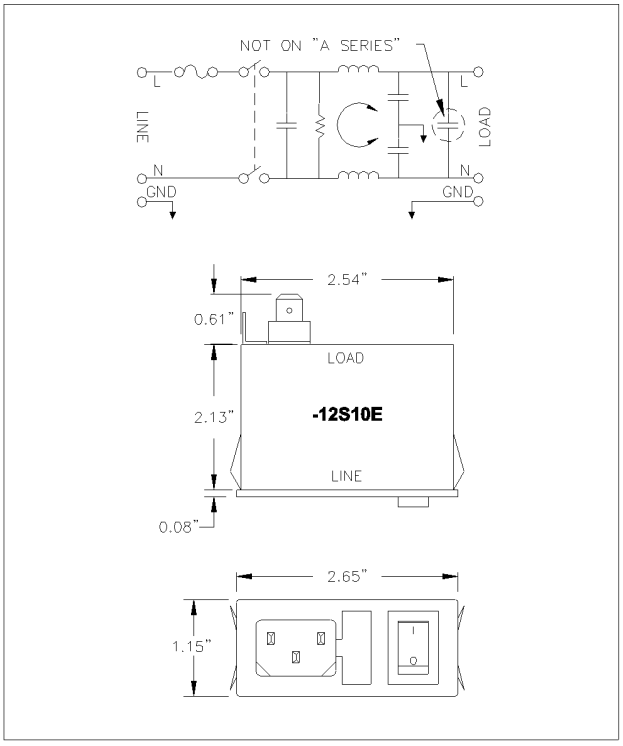

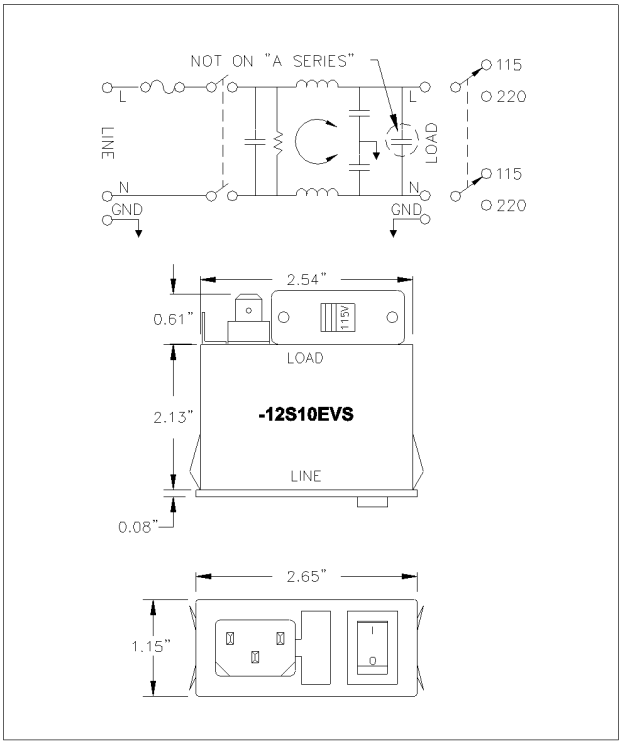

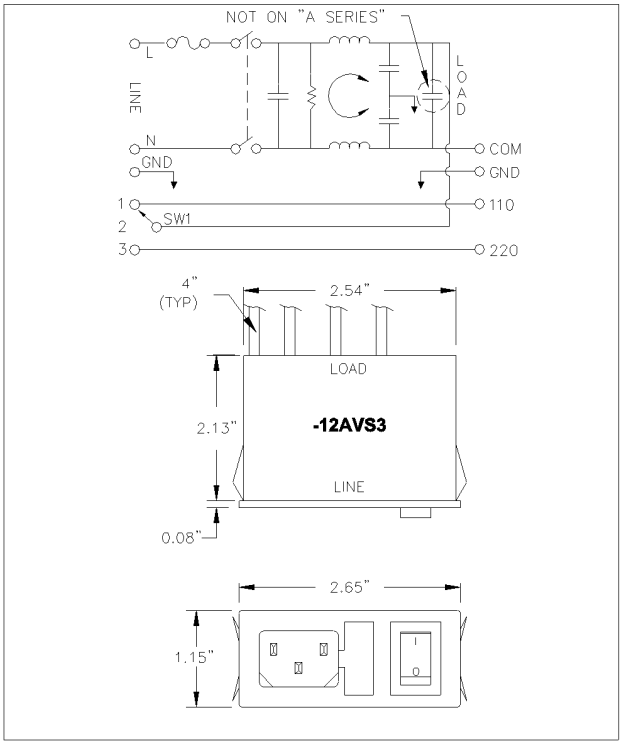

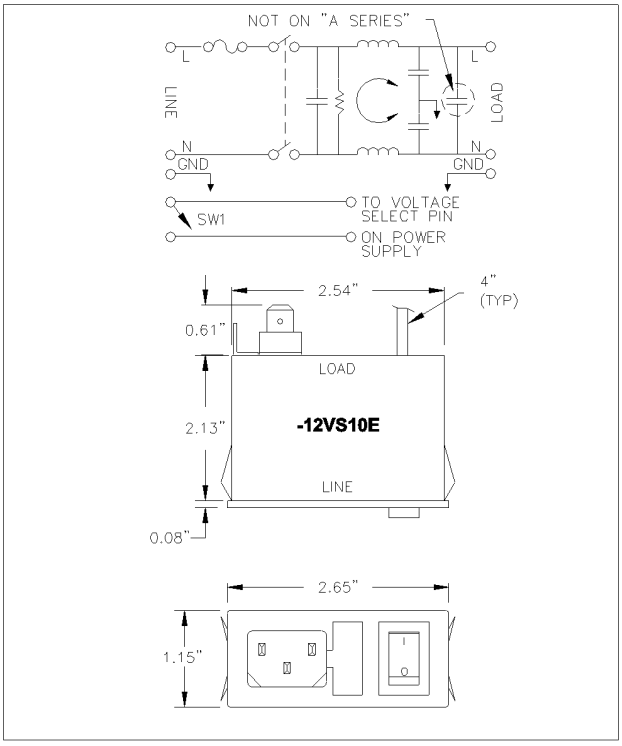

***=PEM=POWER ENTRY MODULE**